

Ready Boards



NRBCON003



NRBCON002

Features

- Switches (light and socket outlets) have a glow-in-the-dark fluorescent insert
- Knockouts for additional circuit breakers and/or auxiliary products, and 15 access points for conduit or twin and earth wire
- Compatible with all prepayment meters
- Bulkhead light (optional)
- Earth leakage protection
- Mounting lugs
- 6 A Euro switched socket
- Meets national specifications

Applications

- Residential - garages, workshops, affordable housing, small holdings, extensions, outbuildings etc.
- Commercial
- Industrial

Optional Accessories

- Bulkhead light
- Different combinations of socket outlets

Approvals

SANS 1619

Technical Data




Product Type	NRBCON002	NRBCON003
Protection	1 x QA17C 63 A 2 x QA -1(13) 20 A	1 x QA17C 63 A 2 x QA-1(13) 20 A
Switches (light and socket outlets)	3 x 16 A switched sockets 1 x 6 A Euro socket	3 x 16 A switched sockets 1 x 6 A Euro socket
Bulkhead light	-	1 x switched bulkhead

Ordering Information

Ready Boards		
Description	Std. Pack	Order No.
1 x QA17C 63 A; 2 x QA-1(13) 20 A; 3 x 16 A switched sockets; 1 x 6 A Euro socket	1	NRBCON002
1 x QA17C 63 A; 2 x QA-1(13) 20 A; 3 x 16 A switched sockets; 1 x 6 A Euro socket; 1 x switched bulkhead	1	NRBCON003




Ready Boards

Dimensional Drawing: Without Bulkhead

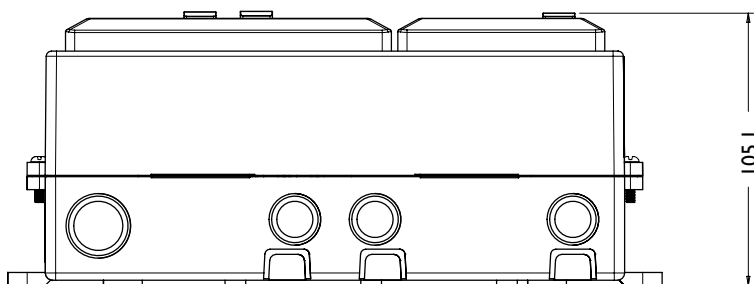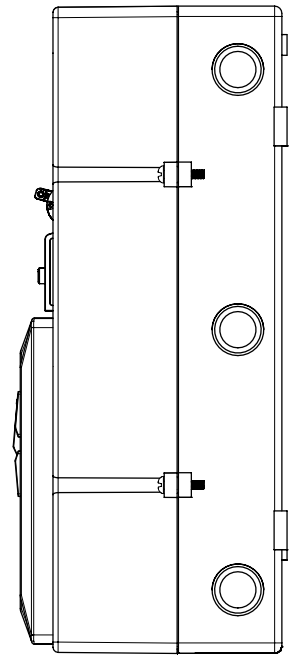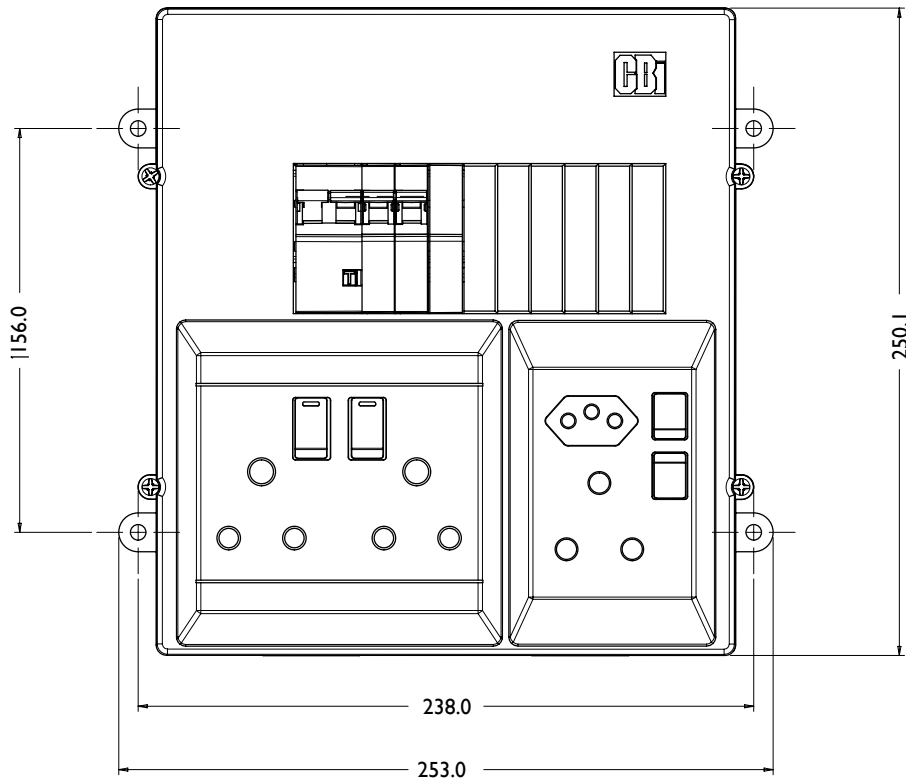

Ready Boards

Dimensional Drawing: With Bulkhead

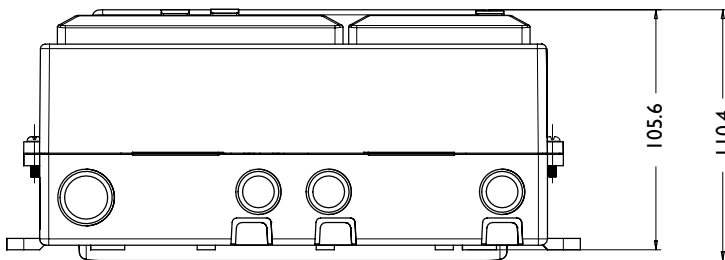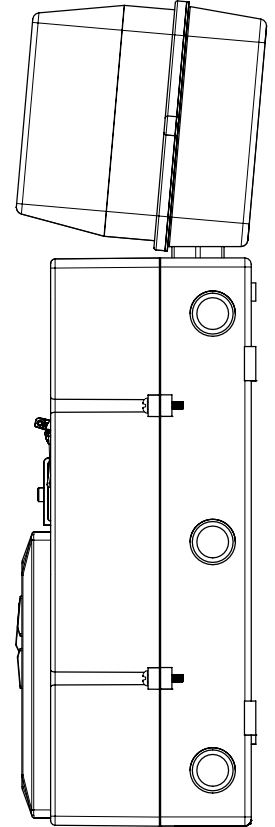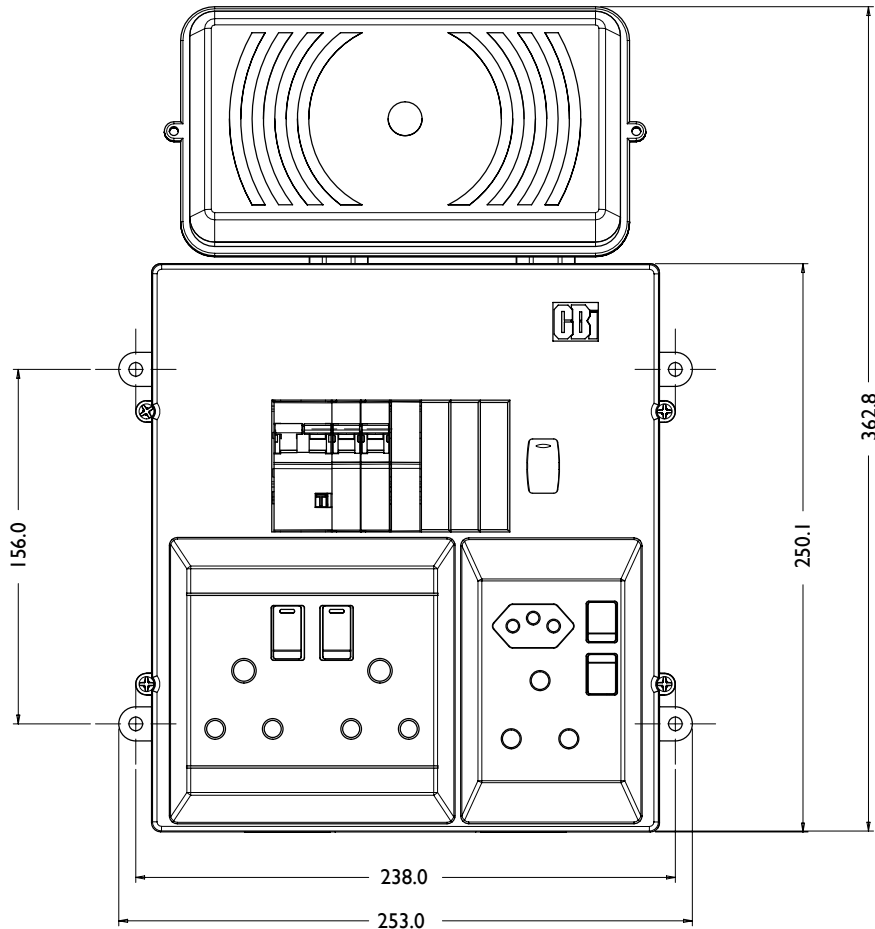

Please review our **Customer Terms and Conditions** on www.cbi-lowvoltage.co.za

All rights reserved. Unless otherwise indicated, all materials on these pages are copyrighted by CBI (Pty) Ltd. No part of these pages, either text or image may be used for any purpose other than personal use. Therefore, reproduction, modification, storage in a retrieval system or retransmission, in any form or by any means, electronic, mechanical or otherwise, for reasons other than personal use, is strictly prohibited without prior written permission. CBI (Pty) Ltd reserves the right to alter any details of this document without notice and while every effort is made to ensure the accuracy of the content, no warranty is given as to the accuracy of this document and no responsibility will be accepted for error or misinterpretation and any resulting loss.

© 2016.09 CBI (Pty) Ltd. All Rights Reserved.

AUSTRALIA

CBI-electric: Australia
 27 Wedgewood Rd, Hallam
 Victoria 3803 Australia
 Tel: +61 3 8752 9300
 Fax: +61 3 9796 5407
 Email: sales@cbi-electric.com.au
 Website: www.cbi-electric.com.au

SOUTH AFRICA

CBI-electric: low voltage
 Tripswitch Drive Elandsfontein
 Gauteng South Africa
 Tel: +27 11 928 2000
 Fax: + 27 11 392 2354
 Email: cbi@cbi-electric.com
internationalsales@cbi-electric.com
 Website: www.cbi-lowvoltage.com

USA

CBI-electric: North America
 35 E. Uwchlan Ave Suite 328
 Exton PA 19341 USA
 Tel: +1 610 524 9949
 Fax: +1 610 524 9945
 E-mail: info@cbibreakers.com
 Website: www.cbibreakers.com